


1 | FRONT VIEW
SCALE: 1/2" = 1' - 0"

39.8 SQ. FT.

2 | SIDE VIEW
SCALE: 1/2" = 1' - 0"

3 | DIMENSIONAL VIEW
SCALE: NTS

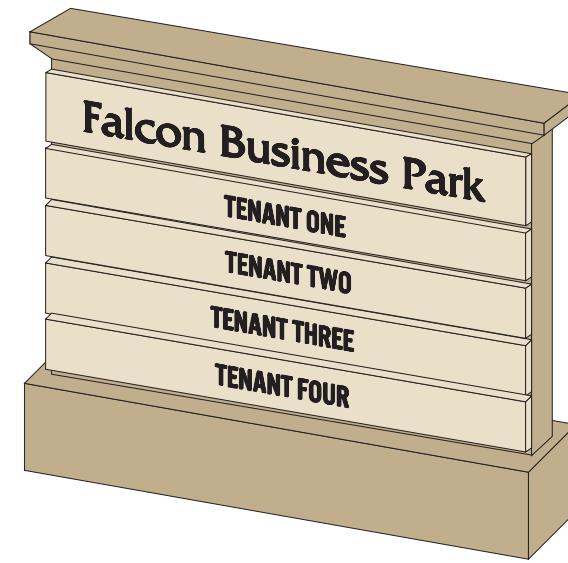

S/F ILLUMINATED MONUMENT SIGN


- 1 ALUMINUM CABINET W/ 1-1/2" TUBE FRAME CONSTRUCTION AND 1/8" ALUMIUNUM SKINS, FACE PANEL ROUTED OUT FOR LEDS, REMOVABLE BACKS
 - INTERNALLY ILLUMINATED W/ 7000K WHITE LED MODULES & SELF-CONTAINED POWER SUPPLY
 - PAINTED
- 2 1-1/2" DEEP 1/8" ALUMINUM ROUTED OUT SHOEBOX TENANT PANEL PAN FACE W/ FOLDED RETURNS
 - REMOVABLE FACE, MOUNTED TO BACKER WITH COUNTERSUNK SCREWS PT.M.
 - PAINTED
- 3 .090 ALUMINUM CONSTRUCTED CAP BRAKED AND FOLDED TO SHAPE WELDED TO 1-1/2 TUBE FRAME
 - PAINTED
- 4 NOT USED
- 5 1/2" THK, 1/4" EXPOSED TRANSLUCENT WHITE ACRYLIC PUSH THRU LETTERS
 - PAINTED .090 ALUM FACES
- 6 3" DIA x 1/4" THK STEEL POST
FOOTING AND POST TO BE CONFIRMED PER ENGINEER

FONT: FRIZ QUADRATA MED & ALT GOTHIC NO 3 D

<p>(A) WHITE</p> <p>(B) PMS BLACK C</p>	<p>(C) SW 6143 BASKET BEIGE</p> <p>(D) SW 6126 NAVajo WHITE</p>
---	---



4 | ILLUMINATION
SCALE: NTS

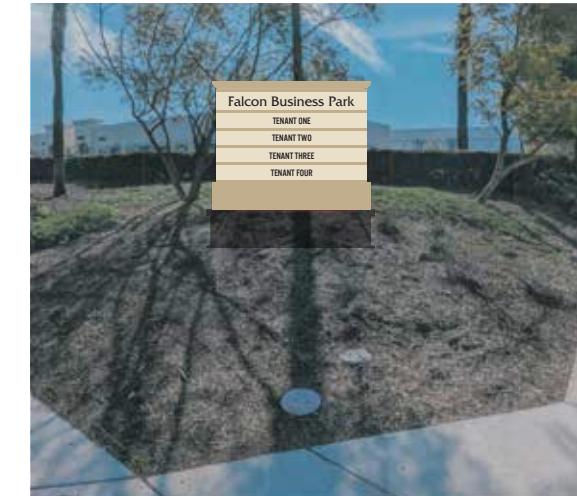

LOCATION 1 : MERIDIAN CORNER (SOUTH-FACING)



LOCATION 2 : INNOVATION CORNER (SOUTH-FACING)

5 | PROPOSED ELEVATIONS
SCALE: NTS

QTY: (2)

PRIMARY ELECTRICAL FEED

CLIENT TO PROVIDE ONE (1) DEDICATED 120-277V/20A, ELECTRICAL CIRCUIT PER SIGN.

SIGN CIRCUITS MUST NOT BE SHARED WITH OTHER LOADS SUCH AS LIGHTING, AIR CONDITIONING OR OTHER EQUIPMENT AND MUST BE LOCATED WITHIN SIX (6) FEET OF CONNECTION POINT OF THE SIGN.


SIGN MUST SATISFY ALL TITLE 24 REQUIREMENTS.

CLIENT TO PROVIDE ONE (1) OF THE FOLLOWING FOR SIGN CIRCUIT:

- A LIGHTING CONTROL PANEL,
- ASTRONOMICAL TIME CLOCK, OR
- PHOTOCELL WITH 24 HOUR TIME CLOCK.

LISTED AND N.E.C.

ALL FABRICATION AND INSTALLATION IN ACCORDANCE WITH SPECIFICATIONS

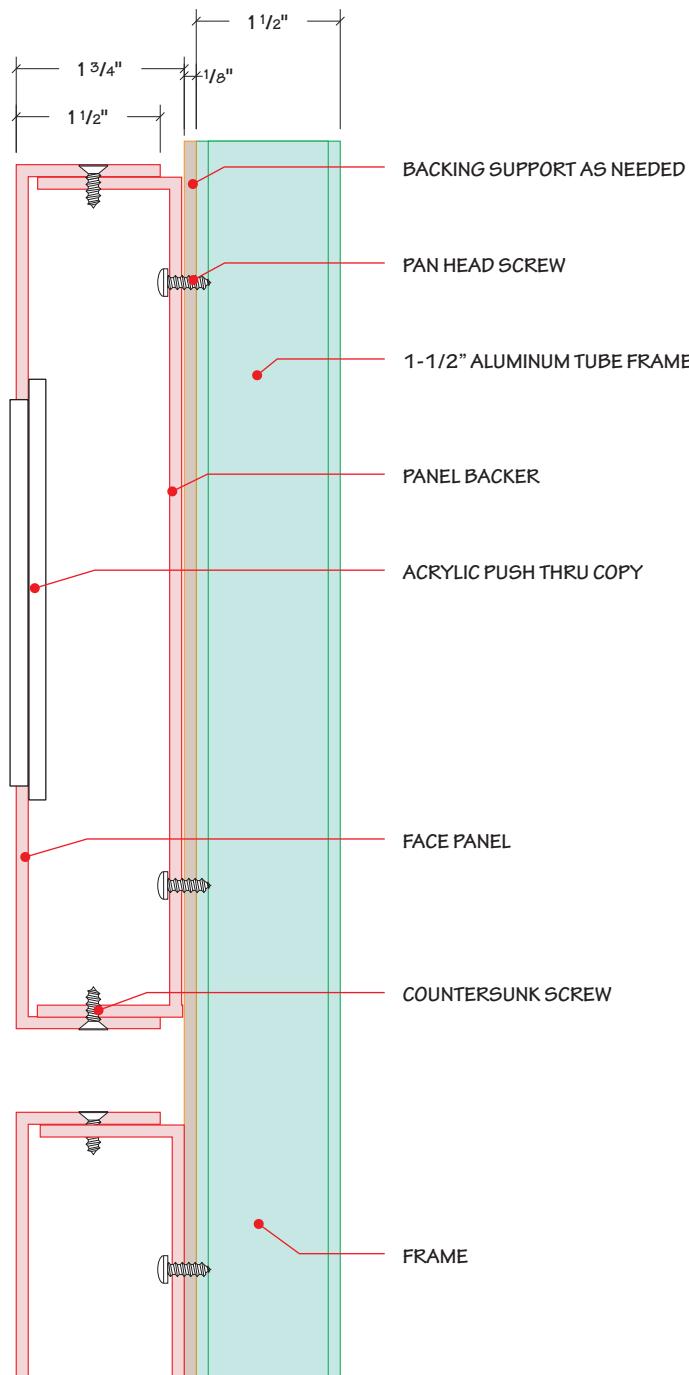

1 | SLIDING TENANT PANEL DETAIL
SCALE: 1:2

PAGE FOR ESTIMATING ONLY